

SPECIFICATIONS

WFA Premium Inline Water Filter System

K-B-PREMIUM

For consumers requiring a dedicated filter tap. WaterMark approved to reduce sediment, chlorine, taste, odour and cysts. Tested to exceed 3,500 kPa burst pressure. Vertical or horizontal installation.

Proprietary filter head technology: **filter cartridge warranted to fit and compatible with all existing WFA12, S54 & H54 installations.**



AS3497
Lic.WMKA22045
IAPMO R&T OCEANA



ANSI/NSF STANDARDS
42 AND 53



MADE IN
USA



ASSEMBLED IN
AUSTRALIA

WaterFilters
AUSTRALIA

WFA Premium Inline Water Filter System

K-B-PREMIUM

SPECIFICATIONS

Service life/change cartridge	12 Months*
Working Pressure	10–125psi
Temperature	2–38°C
Height to allow for cartridge change	335mm
Width of filter head/cartridge	225mm
Flow Rate	0–3 lpm
Micron Rating	1 Micron
Burst pressure	exceeds 3,500 kPa as tested by CSIRO
Warranty	10 years

*Service life will vary according to flow rate, influent line pressure and local water conditions.

INCLUSIONS

- Mini Cistern Tap 1/2" fbsp x 1/2" mbsp
- Dual Check Valve 1/2" fbsp x 1/2" mbsp
- Pex Hose 750mm 1/2" female to 3/8" male
- WFA Filter Head with Mounting Bracket
- WFA Premium Cartridge
- Pex Hose 550mm 1/2" female to 3/8" male
- Filter Tap and connections
- Filter Monitor Alarm
- Mounting Screws
- Plumbing Tape
- Owners Manual

CARTRIDGE RE-ORDER CODE

C-B-PREMIUM


Compatible with all existing WFA6, WFA12, S54 and H54 installations.

PERFORMANCE

Certified to remove/reduce:

- Sediment, dirt, rust
- Chlorine
- Bad taste and odours
- Cysts including Cryptosporidium and Giardia
- Does not remove fluoride, natural minerals & salts

VERTICAL OR HORIZONTAL INSTALLATION

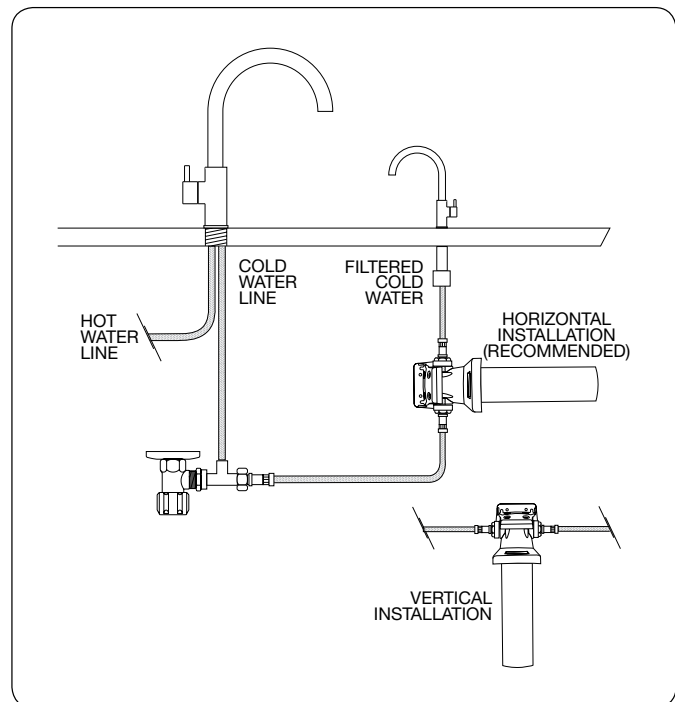

To find out more call us on 02 9905 6211
Or if you prefer, you can email us at sales@wfa.com.au

WaterFilters
AUSTRALIA