SPECIFICATIONS

WFA Vanity Inline Water Filter System

K-B-VANITY







SYSTEM COMPLIES

WITH NSF/ANSI

STANDARDS 42





WFA Vanity Inline Water Filter System

K-B-VANITY

SPECIFICATIONS

Service life/change cartridge	12 months*
Working Pressure	70-500 kPa
Temperature	2–38°C
Height to allow for cartridge change	335mm
Width of filter head/cartridge	225mm
Flow Rate	up to 8 litres per minute

^{*}Service life will vary according to flow rate, influent line pressure and local water conditions.

INCLUSIONS

- WFA Filter Head with Mounting Bracket
- Dual Check Valve
- Pex Hose 650mm 1/2" female to 3/8" male*
- Brass Hex Nipple 3/8" male to 1/2" male*
- Plumbing Tape
- WFA Vanity Cartridge
- Stabilizing Bracket
- Mounting Screws
- Owners Manual

PERFORMANCE

Certified to remove/reduce:


- Sediment
- Chlorine
- Bad taste and odours
- Limescale

CARTRIDGE RE-ORDER CODE

C-B-VANITY

To find out more call us on 1300 785 355 Or if you prefer, you can email us at info@wfa.com.au

VERTICAL OR HORIZONTAL INSTALLATION

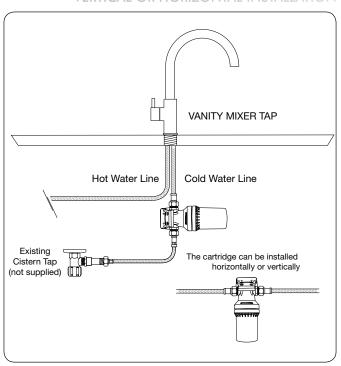



wfa.com.au

^{*}Both parts include a sealing 'O' ring