

SPECIFICATIONS

WFA Premium Inline Water Filter System

K-B-PREMIUM

For consumers requiring a dedicated filter tap. WaterMark approved to reduce sediment, chlorine, taste, odour and cysts. Tested to exceed 3,500 kPa burst pressure. Vertical or horizontal installation.

Proprietary filter head technology: **filter cartridge warranted to fit and compatible with all existing WFA12, S54 & H54 installations.**



**Watermark Certified
Filters down to
1 micron**


WaterMark
AS3497
Lic. WM-022045
IAPMO R&T OCEANA

SYSTEM COMPLIES
WITH NSF/ANSI
STANDARDS 42
AND 53


MADE IN
USA


ASSEMBLED IN
AUSTRALIA

WaterFilters
AUSTRALIA
wfa.com.au

WFA Premium Inline Water Filter System

K-B-PREMIUM

SPECIFICATIONS

Service life/change cartridge	12 Months*
Working Pressure	70-500 kPa
Temperature	2-38°C
Height to allow for cartridge change	335mm
Width of filter head/cartridge	225mm
Flow Rate	0-3 lpm
Micron Rating	1 Micron
Burst pressure	exceeds 3,500 kPa as tested by CSIRO
Warranty	10 years

*Service life will vary according to flow rate, influent line pressure and local water conditions.

PERFORMANCE

Certified to remove/reduce:

- Sediment, dirt, rust
- Chlorine
- Bad taste and odours
- Cysts including Cryptosporidium and Giardia
- Does not remove fluoride, natural minerals & salts

INCLUSIONS

- Mini Cistern Tap 1/2" fbsp x 1/2" mbsp
- Dual Check Valve 1/2" fbsp x 1/2" mbsp
- Pex Hose 650mm 1/2" female to 3/8" male (x2) *
- WFA Filter Head with Mounting Bracket
- WFA Premium Cartridge
- Filter Tap and connections
- Mounting Screws
- Plumbing Tape
- Owners Manual


*This part includes a sealing 'O' ring

CARTRIDGE RE-ORDER CODE

C-B-PREMIUM

Compatible with all existing WFA6, WFA12, S54 and H54 installations.

VERTICAL OR HORIZONTAL INSTALLATION

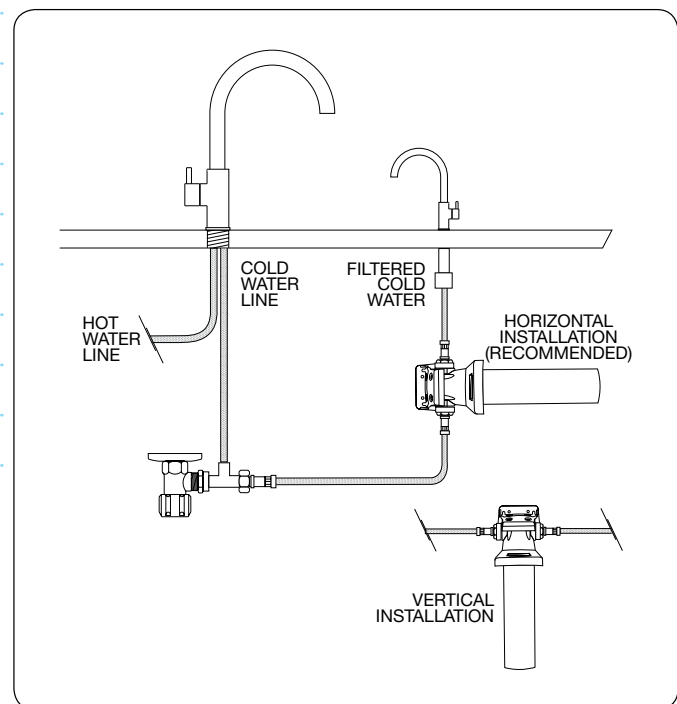

To find out more call us on 02 9905 6211

Or if you prefer, you can email us at info@wfa.com.au

WaterFilters
AUSTRALIA

wfa.com.au